





CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES

1.Mechanical Dimensions

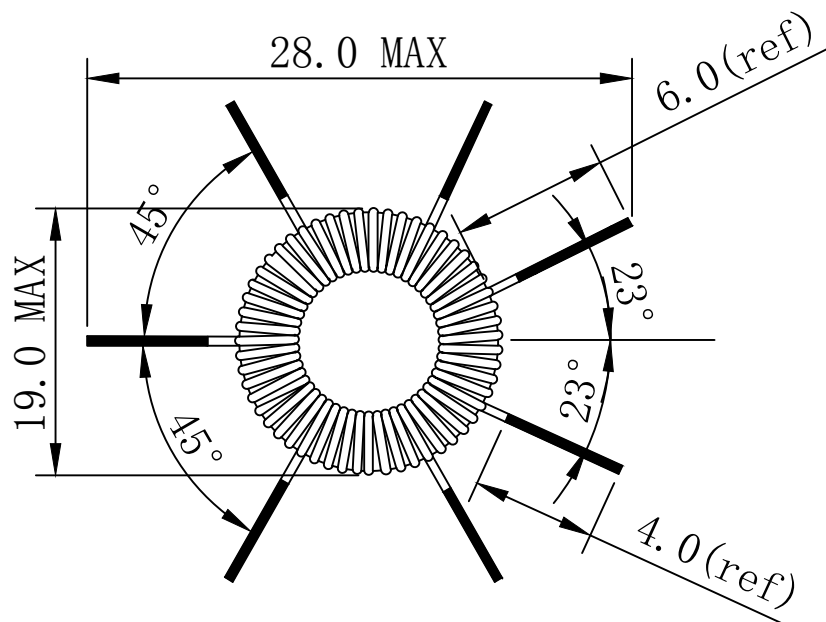

2.Schematic Diagram

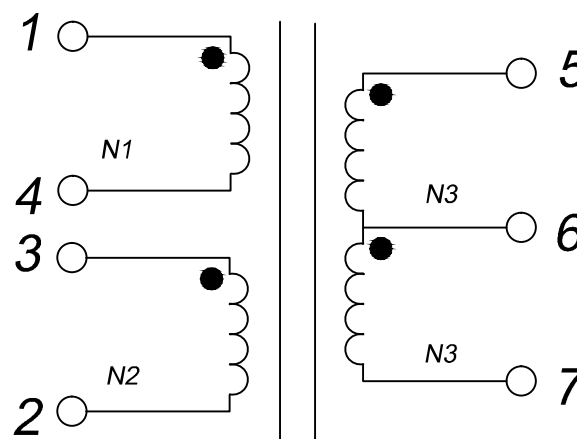

3.Material List

Core:FW40-T16*9*6.3C

Wire: 2UEW-0.355mm 130°C

Operating Temperature: -30 to 115°C

4.Electrical Specification

Inductance: $L(3-2) = 1.194\text{mH} \pm 25\% 1.0\text{KHZ } 1.0\text{V}$

$(1-4) = 68\text{uH} - 114\text{uH } 1.0\text{KHZ } 1.0\text{V}$

$(5-6) = (6-7) 17\text{uH} - 28\text{uH } 1.0\text{KHZ } 1.0\text{V}$

Hi-pot: N1,N2-N3,N4 AC 1500V 5mA 3S

REV.	DATE	 Convention Placement	DRW.	Drawing Title: CHOKE Customer P/N:	Part No: FWCMT161006122M
0	00/00		CHK.		
			APP.		Specification Sheet 1 of 1

RoHS

www.fosopower.com

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION