



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	Yes	Yes



1. Mechanical Dimensions: (mm)

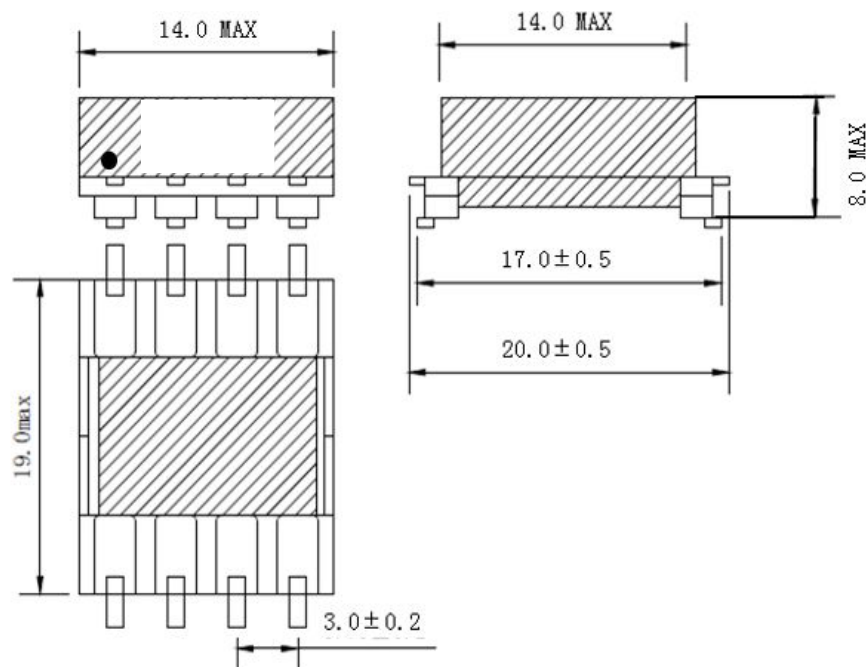

2. Schematic Diagram

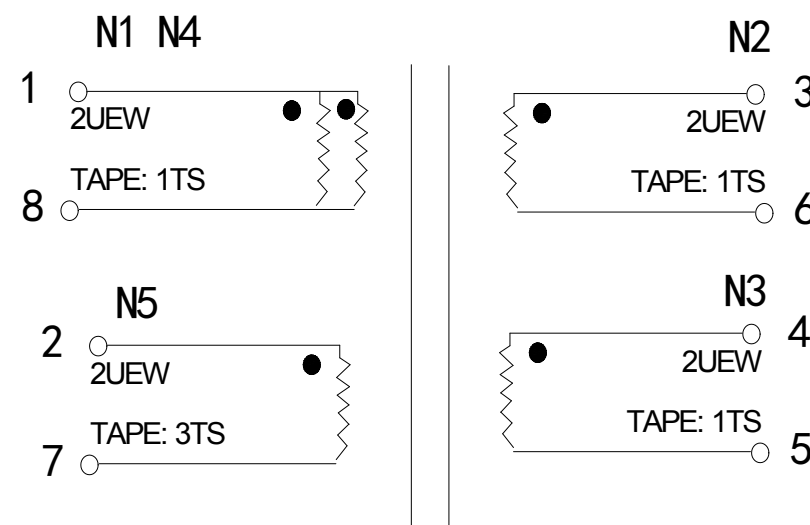

3. Material List

Core: FW40-EFD12

Bobbin: EFD12-PX 4+4PIN

Wire: 2UEW-F


Tape: CT280-25u

4. Electrical Specification

Inductance: L (1-8): $65\mu H \pm 10\%$, (1.0KHZ 1.0V)

Dielectric Strength: Between P-S No Break-down Applied AC 1500V/1mA/60S

Dielectric Strength: Between coil-core No Break-down Applied 500V/1mA/60S

REV.	DATE	 Convention placement	DRW.	DRAWING TITLE	Part No:
0	03/15		CHK.		
			APP.		
RoHS www.fosopower.com				TRANSFORMER Customer P/N:	FWPTEFD12SMD650K SPECIFICATION SHEET 1 OF 1