



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1.Mechanical Dimensions

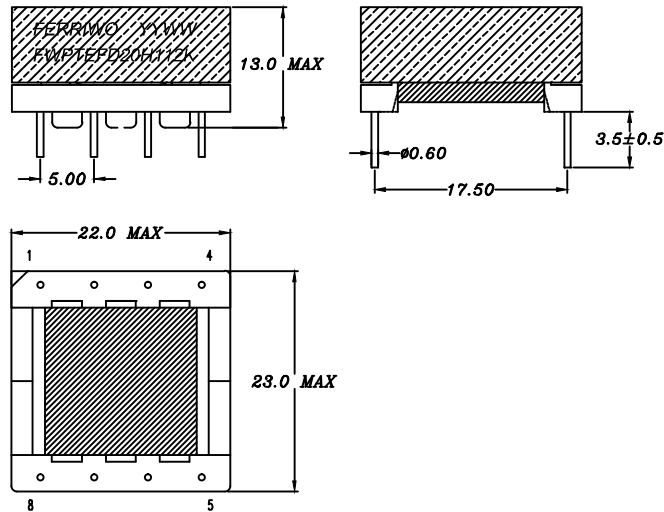

2.Schematic Diagram

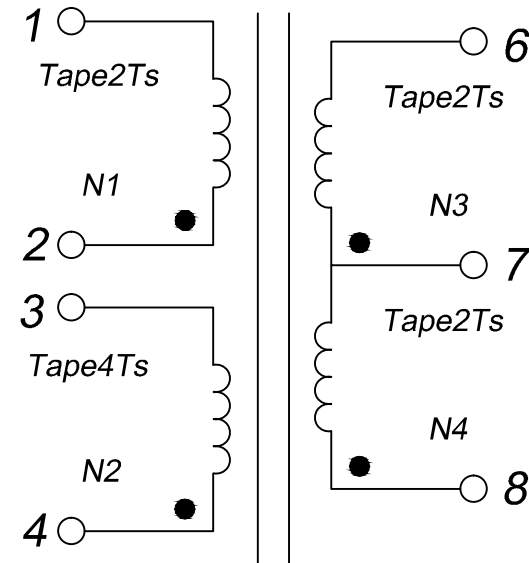

3.Material List

Core:FW44-EFD20

Bobbin:FWB2009

Wire:2UEW-0.32/0.45mm TIW-B-0.32/0.45mm 130℃

Operating Temperature: -30 to 115℃

4.Electrical Specification

Inductance: $L(2-1)=1108\mu H \pm 10\%$ 1.0KHZ 1.0V

LK: $L(2-1)=33.2\mu H$ REF 100.0KHZ 1.0V

Hi-pot: P-S AC 3000V 3mA 1S

COIL-CORE AC 500V 3mA 1S

REV.	DATE	 Convention Placement	DRW.		Drawing Title: TRANSFORMER Customer P/N:	Part No:
0	00/00		CHK.			FWPTEFD20H112K
			APP.			Specification Sheet 1 of 1

RoHS

www.fosopower.com

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION