


CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES




1.Mechanical Dimensions

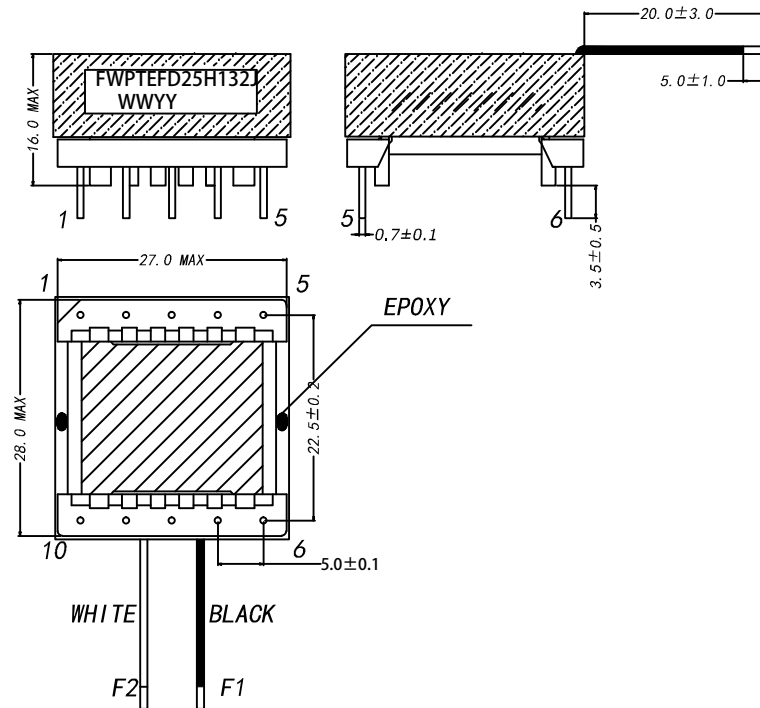

3.Material List

Core:FW44-EFD25/25/9
 Bobbin:FWB2506-1(5+5)
 Wire:2UEW-0.21mm TIW-0.4mm
 Tube:TFL TUBE
 Operating Temperature: -30 to 115℃

2.Schematic Diagram

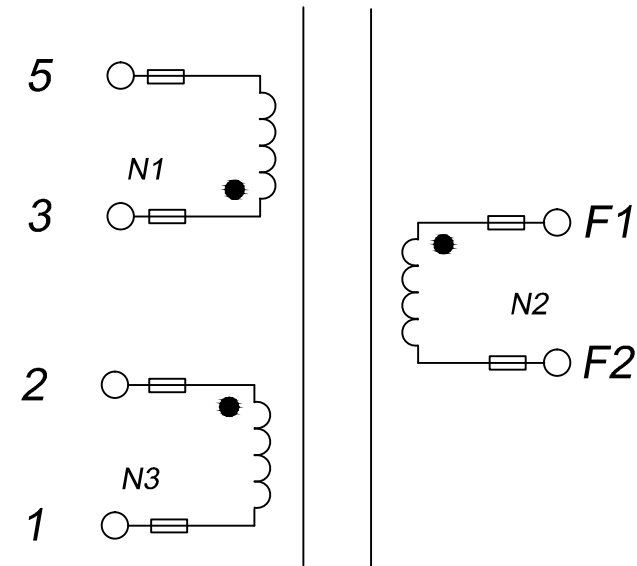

4.Electrical Specification

Inductance: $L(3-5) = 1.35\text{mH} \pm 5\%$ 1.0KHZ 1.0V
 HI-POT: P-S AC 4000V 3mA 60s
 P、S-CORE AC 1000V 3mA 60s

REV.	DATE	 Convention Placement	DRW.		Drawing Title: TRANSFORMER Customer P/N:	Part No: FWPTEFD25H132J
0	00/00		CHK.			
			APP.			Specification Sheet 1 of 1

RoHS

www.fosopower.com