


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	YES	YES




### 1.Mechanical Dimensions

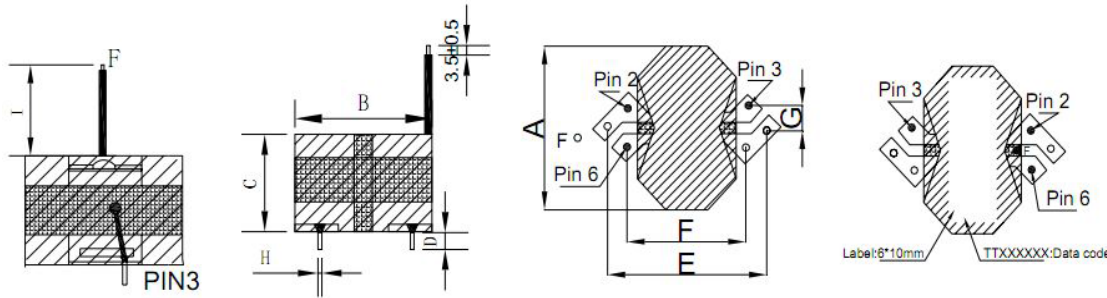

A	19.5	MAX
B	21.0	MAX
C	14.5	MAX
D	3.5	±0.5
E	18.0	±0.4
F	14.4	±0.4
G	1.80	±0.3
H	0.50	±0.1
I	23.00	±2.0

### 2.Schematic Diagram

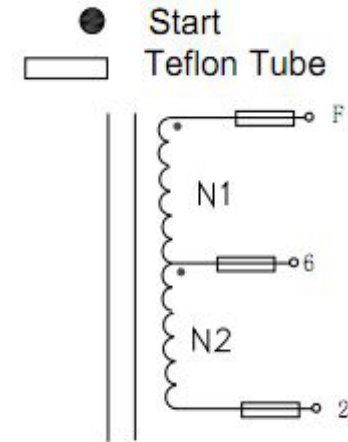

### 3.Material List

Core:FW44 RM6  
 Bobbin:FWB0601(3+3PIN)  
 Wire:2UEW  
 Copper foil:0.025\*3.0/5.0mm  
 Operating Temperature: -30 to115 °C

### 4.Electrical Specification

Inductance : L(F-2):110uH±5% 100KHZ , 0.6V  
 DCR : (F-2)=133.16mΩ MAX  
 Hi-Pot:COIL-CORE: AC 60Hz 1000V 1mA 3S

REV.	DATE	 Convention Placement	DRW.	Drawing Title:	Part No:		
0	00/00		CHK.			<b>TRANSFORMER</b>	FWPTRM6V111J
			APP.			Customer P/N	Specification Sheet 1of 1
<b>ROHS</b>		<a href="http://www.ferriwo.com">www.ferriwo.com</a>					